



Project name:		Type
Catalog number:		
Location:		
Date:		
Comments:		

WAVE-PIR-120/277-N-O/V

ORDERING INFORMATION

Product Code	Description	Color	Part Number
WAVE-PIR-120/277-N-O/V	WAVE PIR Wall Switch Occupancy/Vacancy Sensor, Indoor, 120/277VAC, Neutral Required	White	97342



TOP FEATURES

- Line voltage PIR wall switch occupancy/vacancy sensor with 180°/1200 square foot max detection coverage
- Integral photocell for daylight sensing
- Switch for auto-on or manual-on operation
- Dual voltage 120/277VAC
- Decorative-style wallplate included

DESCRIPTION

The WAVE-PIR delivers a superior 180-degree field of view and a maximum of 1,200 square feet of motion detection coverage. The combination of passive Infrared (PIR) motion detection, photocell, and auto-on (occupancy) or manual-on (vacancy) operation optimizes energy savings, and meets today's stringent energy codes.

The WAVE-PIR provides single-pole, single phase circuit control at 120 or 277 VAC. Mechanical adjustments can be made for range, time-out, and daylight level threshold. The WAVE-PIR mounts in a standard wall box, and a decorative-style cover plate and installation hardware is included. White finish.

OPERATION

The WAVE-PIR detects both motion and the ambient light level and then automates the lights according to the parameters set by the building management. Using the factory settings, the integrated light sensor constantly measures the ambient light. If the light level is below the set threshold, the lights will switch on. If the ambient light level is above the set threshold, the lights will not be allowed to come on. If no motion is detected for the duration of the follow-up time, at the end the lights will turn off. A manual press of the button is always required to turn the lights on when "VAC" mode is selected.

Please refer to the installation instruction/manual for a detailed description of functions and operation.

APPLICATIONS

■ **Indoor applications:**

- Private Offices
- Small Conference Rooms
- Break Rooms and Copy Rooms
- Toilets
- Custodial and Storage Closets
- School/University Classrooms
- Hotel Meeting Rooms
- Healthcare and Laboratory Spaces

PRODUCT INFORMATION


- Designed for indoor use in dry locations
- Line voltage Passive Infrared occupancy/vacancy sensor with 180° field of view and 1,200 square foot max detection coverage
- Integral photocell keeps the lights off in high ambient conditions
- Single circuit switching (single pole, single phase). Neutral connection required
- Switch for Auto-on or Manual-on mode to satisfy energy codes or facility preference
- “Off” mode keeps the lights off indefinitely
- Mechanical adjustment for range, follow-up time, and switch-on threshold
- LED indicator for operation feedback
- Includes decorative-style wall plate, mounting screws, and wire nuts
- ROHS and REACH compliant
- 5 years limited warranty

TECHNICAL DETAILS


Sensor Type:	PIR, occupancy/vacancy
Operating Voltage:	120/277VAC, 60Hz
Max Load (Resistive):	800W
Max Load (Fluorescent):	800VA @ 120VAC / 1600VA @ 277VAC
Min Load:	None
Max Load (Motor):	1/4 Hp motor
Max Sensor Range:	40 ft / 1200 ft ²
Best Performance:	20 ft / 320 ft ²
Follow-up time:	15 sec to 30 min
Switch-on threshold:	30 Lux to daylight
Operating Temperature :	32 F to +131 F / 0 °C to +55 °C

Storage Temperature:	14 F to 140 F / 0 °C to +55 °C
Relative Humidity:	95% non-condensing
Mounting:	Standard wall box
Certifications:	UL/cUL listed


WIRING DIAGRAM

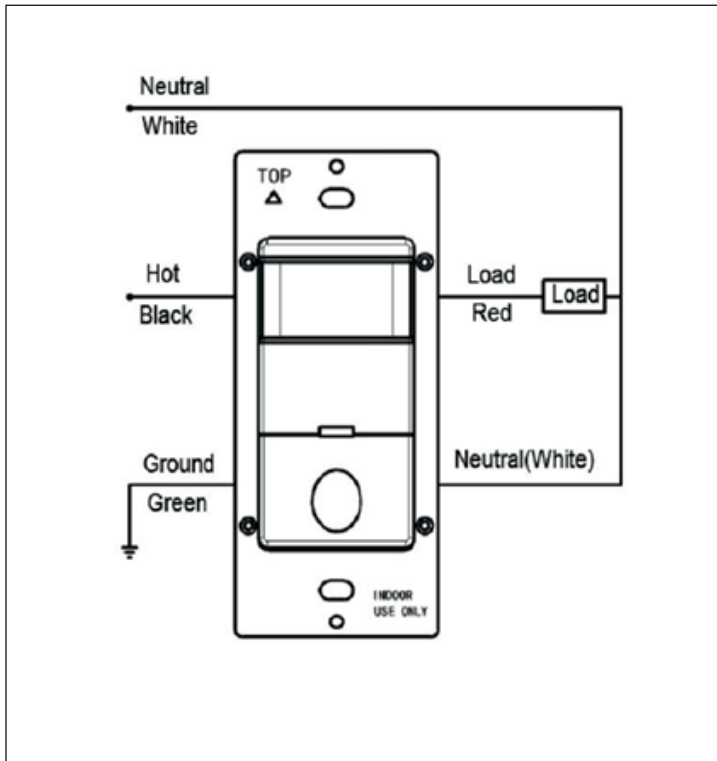

DIMENSIONS DRAWING

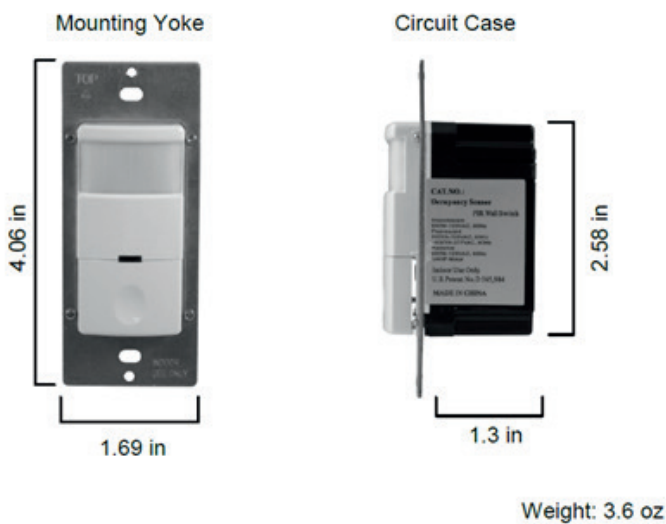

DETECTION AREA

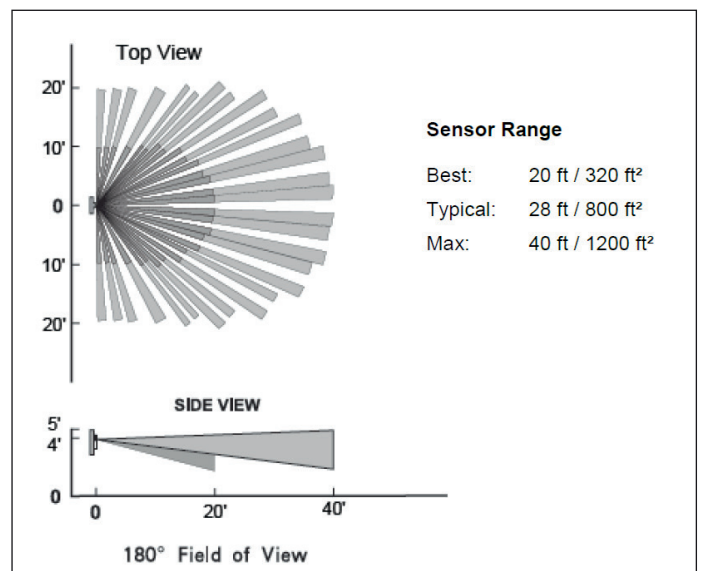

Note: Product specifications are subject to change without notice. Please consult the B.E.G. Controls web site for the most recent product specifications.